


KLIMAKONWEKTOR KANAŁOWY V2 4-RUROWY NISKI SPREŻ

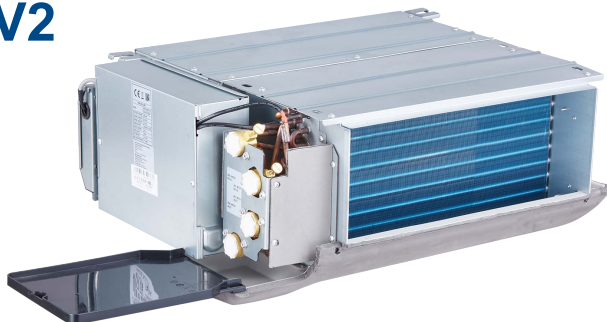

KCT-04 SR
Rekomendowany
termostat


Certyfikacja:




Tabela techniczna

Model	KFC-PD-4T-200D3	KFC-PD-4T-300D3	KFC-PD-4T-500D3	KFC-PD-4T-700D3	KFC-PD-4T-1000D3	KFC-PD-4T-1200D3
Wydajność chłodnicza min/max.	1.30 / 2.70	2.92 / 3.50	3.68 / 4.90	5.24 / 6.70	6.72 / 8.20	7.42 / 9.70
Wydajność grzewcza min/max.	1.50 / 2.70	3.78 / 4.30	4.98 / 6.10	5.58 / 6.70	9.07 / 10.60	8.66 / 10.70
Przepływ powietrza n/ś/w	179/313/450	502/558/620	636/785/940	890/1068/1250	1161/1359/1560	1234/1521/1800
Ciśnienie akustyczne n/ś/w	20.5/27.5/37	32/34.5/37	37.5/40.5/45	35.5/39.5/43.5	40.5/44/47	36.5/41.5/45
Waga netto	13.5 kg	13.5 kg	19.0 kg	22.5 kg	27.5 kg	35.5 kg
Maksymalne ciśnienie statyczne	50 Pa					
Zasilanie	220-240/1/50 V/f/Hz					
Pobór energii min/max	6W / 27W	17W / 31W	26W / 64W	34W / 86W	48W / 114W	39W / 105W
Przepływ w chłodzeniu min/max.	0.23/0.49 m3/h	0.51/0.62 m3/h	0.63/0.84 m3/h	0.87/1.13 m3/h	1.19/1.43 m3/h	1.8/1.68 m3/h
Podłączenie hydrauliczne hot/cold	3/4"					

SCHEMAT ELEKTRYCZNY

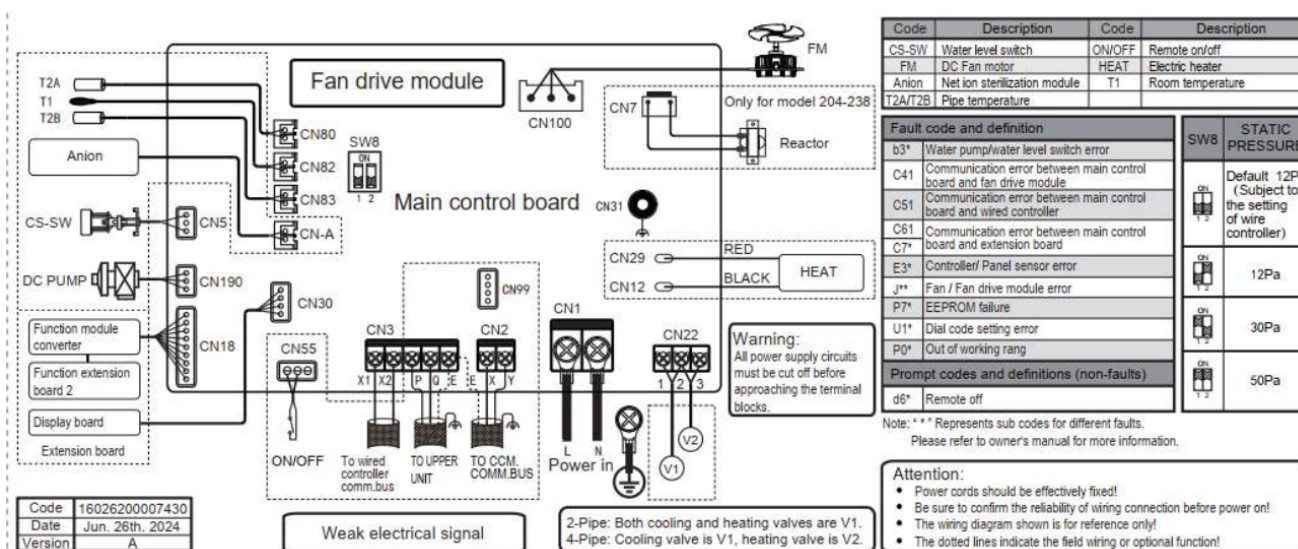

WYMIARY & WAGA

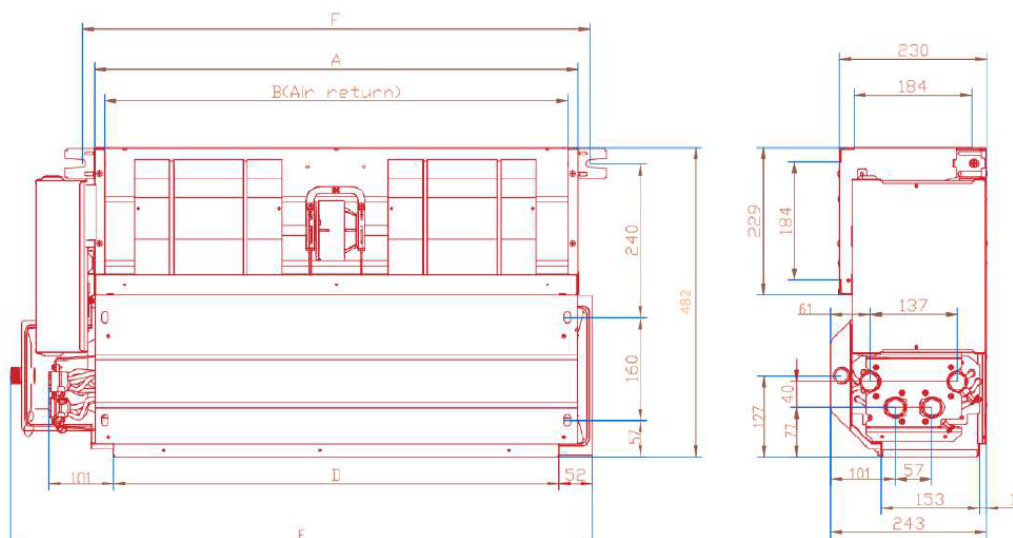

Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Waga (kg)
KFC-PD-4T-200D3	475	443	442	415	632	513	13.5
KFC-PD-4T-300D3	620	588	587	560	773	658	13.5
KFC-PD-4T-500D3	755	723	722	695	908	793	19.0
KFC-PD-4T-700D3	1025	993	992	965	1178	1063	22.5
KFC-PD-4T-1000D3	1215	1183	1182	1155	1368	1253	27.5
KFC-PD-4T-1200D3	1505	1473	1472	1445	1658	1543	35.5