

ORIGINAL
MANUAL



OWNER'S MANUAL



KCCHT-06 MODBUS






Thank you very much for purchasing our product.
Before using your unit, please read this manual carefully and keep it for future reference.




- This manual gives detailed description of the precautions that should be brought to your attention during operation.
- In order to ensure correct service of the wire controller please read this manual carefully before using the unit.
- For convenience of future reference, keep this manual after reading it.

Restore initialization

If the user accidentally sets the display language of the wire controller to a language that the user does not know, the following three steps can be used to restore the wire controller to the factory setting and reset the display language:

1) Power off the wireline controller and power it on again. Press and hold  +  +  to enter the following page within 60 seconds.

1	2	3
4	5	6
7	8	9

2) Press the buttons from left to right, from top to bottom, click  ->  ->  ->... Turn on 1, 2, 3, 4, 5, 6, 7, 8 and 9, wait for 100% initialization, and enter the FCT page. After entering the FCT page, the version number is displayed. All set parameters of the equipment are reset to the default parameters, and saved. The timing settings and fault records are cleared. The equipment returns to the factory state. (exit FCT after power on again).

3) Power off the wireline controller and power it on again. The display language will be reset. Press "▲" "▼" "◀" "▶" to select the language of the remote controller. After the language setting is completed, click "↵", select "YES", and then click "↵" to enter the SETTING ADDRESS interface. After setting SETTING ADDRESS, click "↵" to enter GENERAL SETTING. Then after setting GENERAL SETTING, click "↵".

Contents

1 Safety Precautions	1
2 Overview of Wired Controller.....	3
3 Function Introduction	8
4 Attached Table 1: Outdoor unit errors and protection codes	38
5 Attached Table About Modbus	42

1 Safety Precautions

The product and Operation and Installation Instructions record the following content, including the operation method, how to prevent harms to others and property losses, and how to use the product correctly and safely. Read the text after understanding the content (identification and marker maps) below carefully, and observe the precautions below.

⚠ Caution



Read the safety precautions carefully prior to installation. The important safety precautions are provided below and must be observed. Meanings of marks:



⚠ Caution Means improper handling may lead to personal injuries or material damages.

⚠ Warning Means improper handling may lead to death or serious injury. After the installation work is completed, confirm that the trial operation is normal and hand over the manual to the customer for keeping.

[Note]: So-called "injuries" mean the harms not requiring hospitalization or long-term treatment, generally referring to wounds, burns, or electric shocks. Material damages refer to property and material losses.

1 Safety Precautions

Icon	Name
	It indicates "prohibited". The specific content of prohibition is provided using graphics or text in the icon or nearby.
	It indicates "mandatory". The specific mandatory content is provided using graphics or text in the icon or nearby.

 Warning	Entrusted installation	Entrust your distributor or a professional to install the product. The installation operator must have acquired the relevant professional knowledge. In case of independent installation, wrong operations will lead to a fire, electric shock, or injury.
	 Caution in Use	Prohibited
Prohibited		Do not perform operations with a wet hand or allow water to enter the wired controller; otherwise the wired controller will be damaged.

Caution

- Do not install the product at a place where flammable gas easily leaks. Once flammable gas leaks and stays around the wired controller, a fire may be caused.

2 Overview of Wired Controller

Basic using conditions:

1)Power range: power input: AC 8V ~ 12V;


2)Operating temperature: -20°C~60°C;

Operating humidity: RH40%~RH90%;


Where: HP—HEAT PUMP;CO—ONLY COOLING;FC—FREE COOLING.

It's a general manual. The functions of different models are different. The wired controller automatically recognizes and hides irrelevant interfaces. Please set and inquire related parameters according to the outunit model.

2.1 Operation Interface Description

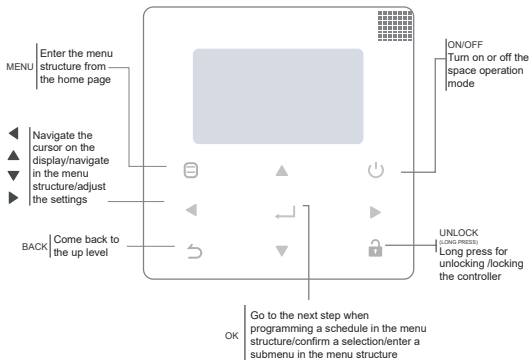

2 Overview of Wired Controller

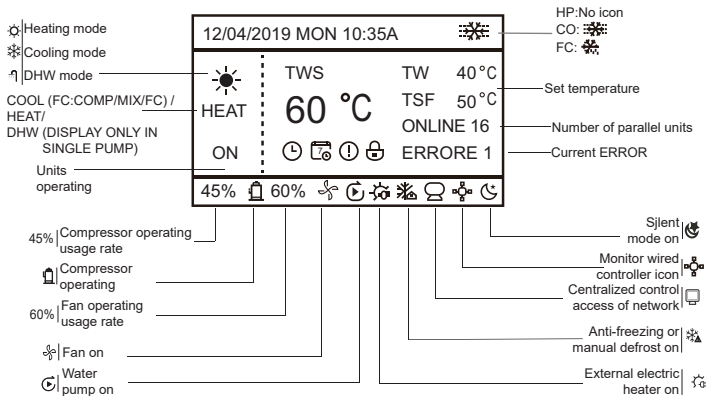

Set temperature: TWS/T5S: SETTING TEMPERATURE; TW: TOTAL OUTLET WATER TEMPERATURE, T5: TANK TEMPERATURE; TSF: SAFE TEMPERATURE;



DAILY TIMER / WEEKLY SCHEDULE / ERROR / LOCK

3 Function Introduction



Power on for the first time or restore factory settings, you need to preset: SETTING ADDRESS and GENERAL SETTING. Click " ← " after setting. Please follow the interface prompts.

3.1 Unlocking/Locking Operation

When the wired controller is locked, press and hold the " 🔒 " button for 3s to unlock it. Then the lock icon is not displayed and the wired controller can be operated.

When the wired controller is unlocked, press and hold the " 🔒 " button for 3s to lock it. Then the lock icon is displayed and the wired controller cannot be operated. When there is no operation for continuous 60s on any page, the wired controller returns to the home page and automatically locks, displaying the lock icon.

Note: It can only be locked by long pressing the " 🔒 " button for 3s under the main page, and it is invalid under the " 📄 " page.







3.2 Power-on/off




When the wired controller is unlocked and the unit is on, " ⏻ " can be pressed to power off the unit under the home page only. And it can be pressed to power on the unit when the unit is off.

In the unlocked state, the set temperature can be adjusted by pressing ▲ ▼ button. And you need to Press " ← " button to confirm after setting. It's invalid without confirmation within 5s.

	LOCK	UNLOCK: ON	UNLOCK: OFF
HP-COOLING	<div style="border: 1px solid black; padding: 2px;"> <p>12/04/2019 MON 10:35A</p> <p> TWS TW 9°C</p> <p>COOL 7 °C ONLINE 16</p> <p>ON </p> <p>45% 60% </p> </div>	<div style="border: 1px solid black; padding: 2px;"> <p>12/04/2019 MON 10:35A</p> <p> TWS TW 9°C</p> <p>COOL 7 °C ONLINE 16</p> <p>ON </p> <p>45% 60% </p> </div>	<div style="border: 1px solid black; padding: 2px;"> <p>12/04/2019 MON 10:35A</p> <p> TWS TW 9°C</p> <p>COOL 7 °C ONLINE 16</p> <p> </p> <p> </p> </div>
CO-COOLING	<div style="border: 1px solid black; padding: 2px;"> <p>12/04/2019 MON 10:35A </p> <p> TWS TW 9°C</p> <p>COOL 7 °C TSF 5°C ONLINE 16</p> <p>ON </p> <p>45% 60% </p> </div>	<div style="border: 1px solid black; padding: 2px;"> <p>12/04/2019 MON 10:35A </p> <p> TWS TW 9°C</p> <p>COOL 7 °C TSF 5°C ONLINE 16</p> <p>ON </p> <p>45% 60% </p> </div>	<div style="border: 1px solid black; padding: 2px;"> <p>12/04/2019 MON 10:35A </p> <p> TWS TW 9°C</p> <p>COOL 7 °C TSF 5°C ONLINE 16</p> <p> </p> <p> </p> </div>
FC-COOLING	<div style="border: 1px solid black; padding: 2px;"> <p>12/04/2019 MON 10:35A </p> <p> TWS TW 9°C</p> <p>COMP 7 °C TSF 5°C ONLINE 16</p> <p>ON </p> <p>45% 60% </p> </div>		
	<div style="border: 1px solid black; padding: 2px;"> <p>12/04/2019 MON 10:35A </p> <p> TWS TW 9°C</p> <p>MIX 7 °C TSF 5°C ONLINE 16</p> <p>ON </p> <p>45% 60% </p> </div>		
	<div style="border: 1px solid black; padding: 2px;"> <p>12/04/2019 MON 10:35A </p> <p> TWS TW 9°C</p> <p>FC 7 °C TSF 5°C ONLINE 16</p> <p>ON </p> <p>45% 60% </p> </div>		
HP-HEATING	<div style="border: 1px solid black; padding: 2px;"> <p>12/04/2019 MON 10:35A</p> <p> TWS TW 40°C</p> <p>HEAT 55 °C ONLINE 16</p> <p>ON </p> <p>45% 60% </p> </div>	<div style="border: 1px solid black; padding: 2px;"> <p>12/04/2019 MON 10:35A</p> <p> TWS TW 40°C</p> <p>HEAT 55 °C ONLINE 16</p> <p>ON </p> <p>45% 60% </p> </div>	<div style="border: 1px solid black; padding: 2px;"> <p>12/04/2019 MON 10:35A</p> <p> TWS TW 40°C</p> <p>HEAT 55 °C ONLINE 16</p> <p> </p> <p> </p> </div>
HP-HOTWATER	<div style="border: 1px solid black; padding: 2px;"> <p>12/04/2019 MON 10:35A</p> <p> TSS TS 40°C</p> <p>DHW 60 °C ONLINE 16</p> <p>ON </p> <p>45% 60% </p> </div>	<div style="border: 1px solid black; padding: 2px;"> <p>12/04/2019 MON 10:35A</p> <p> TSS TS 40°C</p> <p>DHW 60 °C ONLINE 16</p> <p>ON </p> <p>45% 60% </p> </div>	<div style="border: 1px solid black; padding: 2px;"> <p>12/04/2019 MON 10:35A </p> <p> TSS TS 40°C</p> <p>DHW 60 °C ONLINE 16</p> <p> </p> <p> </p> <p>45% 60% </p> </div>

3.3 Mode Setting

In Unlock mode, Press "  " button to enter the menu setting interface, Press "  " and "  " buttons to select "MODE" and set a mode, and Press "  " button as shown in the above figure to access the submenu (mode setting). As shown below: three modes available.





Cycle: Cooling-->Heating-->DHW-->Cooling. Skip the mode cycle when there is no corresponding mode. The DHW mode is divided into single pump (no need to select the address) and multiple pumps (need to select address 00-15, and the address of the unit without DHW function is directly skipped).

Only Tws/T5s and address can be set in cooling, heating and DHW mode. Tw/T5 can only be displayed but not be set. DHW can only be power on/off under the MODE setting.



HP-Cooling setting range lower limit is subject to the low water outlet control setting under SERVICE MENU. CO/FC-Cooling setting range lower limit is subject to the lowest outlet water temperature set by antifreeze ratio under PROJECT MENU.

Note: When the setting temperature is lower than 5°C, the water-side system must increase more than 15% of antifreeze, otherwise there will be a risk of damage to the unit.

Press "  " to save the settings after setting and back to homepage. Or press "  " to back. When there is no operation for continuous 60s, it will save the settings and back to homepage.

3.4 Menu Setting

When the wired controller is unlocked, press "⊖" to enter menu setting page as follows:





The default selection is "MODE" and choose the menu you need by pressing "▲ ▼". Press "←" to enter its submenu or back to homepage by "↶". Back to homepage if there is no operation for 60s under menu page.

Note: the mode menu is invalid when the unit is controlled by modbus or host computer and display as above.


4.3.6.1 USER MENU

Select "USER MENU" to enter the user menu. The interface display is as follows:




Users choose functions by " ▲ ▼ ".

Select "QUERY" in the "USER MENU" interface to access the query function. The interface display and operation are as follows:

QUERY
STATE QUERY
TEMP QUERY
HISTORY ERRORS QUERY
OK 

State query


Select "STATE QUERY" and press " ← | ". Display as follows:

STATE QUERY	
SELECT ADDRESS	◀ 11 ▶ #
OPERATION STATE	STANDBY
RUNNING MODE	COOL
CURRENT MODE	NIGHT SILENT1
BACK 	

Select address by pressing " ◀ ", " ▶ " to view the status of the unit at that address. Back to upper menu by " ↶ ".

Temp query



Select "TEMP QUERY" and press "↵". Display as follows:

TEMP QUERY	
SELECT ADDRESS	◀ 11 ▶ #
INLET WATER TEMP	25 °C
OUTLET WATER TEMP	25 °C
TOTAL OUTWATER TEMP	25 °C
AMBIENT TEMP	25 °C
BACK 	

Select address by pressing "◀", "▶" to view the temperature of the unit at that address. Back to upper menu by "↶".

History errors query

Select "HISTORY ERRORS QUERY" and press "↵". Display as follows:

HISTORY ERRORSQUERY	
SELECT ADDRESS	◀ 11 ▶ #
1 2 3 4 5 6 7 8	
E2:11/3/2020 15:05P COMMUNICATION ERROR	
OK  	

Select address by pressing "◀", "▶" to view the history errors of the unit at that address. Press "▲" "▼" to choose the history error that you want and the number of errors that can be viewed is 16.

Timer setting

Select "TIMER" and press "←↓". Display as follows:

TIMER
DAILY TIMER
WEEKLY SCHEDULE
OK

TIMER
DAILY TIMER(DISABLE)
WEEKLY SCHEDULE(DISABLE)
OK

Note: After MODBUS control and the remote control of the external machine are used, the daily and weekly time settings of the wired controller are invalid, and users cannot enter the timing menu for setting.

When MODBUS control and the remote control of the external machine are invalid. Select "DAILY TIMER" and press "←↓". Display as follows:


DAILY TIMER	
TIMER	◀ 1 ▶ #
ACT	◀ OFF ▶
TIME ON	◀ 10:00 ▶ A
TIME OFF	◀ 10:00 ▶ A
MODE	◀ HEAT ▶
OK	1/2

DAILY TIMER	
TWS	◀ 40 ▶ °C
SILENT MODE	◀ NIGHT ▶ SILENT1
OK	2/2

Only one setting is enabled between "DAILY TIMER" and "WEEKLY SCHEDULE". If any of the pattern in "WEEKLY SCHEDULE" is set to ON, "DAILY TIMER" is disabled. "DAILY TIMER" can be set across days, but "WEEKLY SCHEDULE" can't.

Users can set up to two timers, and set the ON or OFF time (set the interval of time to 10 minutes), operation mode(there are heating, cooling and DHW modes for single pump; only cooling and heating modes can be selected for multiple pumps, and it cannot be set as DHW mode) and temperature setting for each segment of timer.

It's invalid if the ON and OFF time are same. Display as follows:



Operating Introduction:

Press "▲" "▼" to select TIMER, ACT, TIME ON, TIME OFF, MODE, TWS or SILENT MODE. When the cursor stays at "TIMER", press "◀" and "▶" to select "TIMER 1" or "TIMER 2". When it stays at other items, we can also use "◀", "▶" to adjust corresponding settings.

After setting, press "↶" to confirm saving, or press "↷" to cancel setting and return to the previous interface.

If Time1 T.ON is set the same as Time1 T.OFF, then the setting is invalid, the ACT option for the timer of this segment jumps to "OFF", the setting of Timer2 is the same as that of Timer1, and the timing interval of Time2 can cross with that of Time1.

For example, if Timer1 T.ON is set to 12:00 and Timer1 T.OFF is set to 15:00, then the values of Timer2 T.ON and Time2 T.OFF can be set in the range of 12:00-15:00. If the time interval crosses, the machine will be powered on at the time T.ON which is set in Timer1 or Timer2, and will be powered off at the time T.OFF which is set in Timer1 or Timer2.

After the daily timer function setting is enabled, there will be corresponding prompts displayed on the homepage.

When two timers overlap, the second setting takes precedence.

Weekly schedule setting:

Select "WEEKLY SCHEDULE" and press "←↵". Display as follows:

WEEKLY SCHEDULE	
WEEKLY SCHEDULE	◀ MON ▶
WEEKLY SWITCH	◀ OFF ▶
OK	1/2

MONDAY TIMER	
TIMER	◀ 1 ▶ #
ACT	◀ OFF ▶
TIME ON	◀ 10:00 ▶ A
TIME OFF	◀ 10:00 ▶ A
MODE	◀ HEAT ▶
OK	1/2

MONDAY TIMER	
TWS	◀ 40 ▶ °C
SILENT MODE	◀ NIGHT ▶ SILENT1
OK	2/2

Press "▲" and "▼" buttons to select "WEEKLY SCHEDULE" or "WEEKLY SWITCH". And press "◀" or "▶" buttons to select Monday to Sunday.

After changing a setting, you need to press "←↵" to confirm or enter the submenu. For "WEEKLY SWITCH", "OFF" means not to set the timing for this day or cancel the set timing. When change to "ON" and confirm, you will enter the day timer. The operation is the same as the day timer. The page refers to the day timer. The top displays the set day and Timer 1 or Timer 2 for that day.

There can be up to 2 timings in a day of weekly timing, and each timing needs to be set on and off time (set interval is 10 minutes).

Operating Introduction:

Press "▲" and "▼" to select "WEEKLY SCHEDULE". Select the day you need by "◀" or "▶", and press "←↵" to enter it. Then you can switch between TIMER, ACT, TIME ON, TIME OFF, MODE, TWS and SILENT MODE by "▲" and "▼". Refer to the operating introduction of "DAILY TIMER".

General setting:

Select "GENERAL SETTING" and press "←↵". Display as follows:

GENERAL SETTING	
YEAR	◀ 2020 ▶
MONTH	◀ 12 ▶
DAY	◀ 10 ▶
12-24HOUR	◀ 12 ▶
HOUR	◀ 10 ▶
OK	1/2

GENERAL SETTING	
MINUTE	◀ 55 ▶
AMPM	◀ AM ▶
LANGUAGE	◀ ENGLISH ▶
BACKLIGHT	◀ 20 ▶
OFF DELAY(s)	
OK	2/2

Press " ▲ " and " ▼ " to select the date, time, and time format to be set. Adjust their parameters by " ◀ " or " ▶ ", and press " ↵ " to save. The backlight time setting range is 10-1200s, the default is 60s, and each adjustment is 10s.

Back to previous page by " ⏪ " after setting. Only English is supported now.

Double Setpoint

Select "DOUBLE SETPOINT" and press " ↵ ". Display as follows:

DOUBLE SETPOINT	
DOUBLE SETPOINT	◀DISABLE▶
SETPOINT COOL_1	◀ 16 ▶ °C
SETPOINT COOL_2	◀ 20 ▶ °C
SETPOINT HEAT_1	◀ 16 ▶ °C
SETPOINT HEAT_2	◀ 25 ▶ °C
OK	⏪ ⏩

Press " ▲ " and " ▼ " to select items and " ◀ " or " ▶ " to adjust parameters.

the lower limit of the set range of HP refrigeration is subject to the low water outlet control set under SERVICE MENU, and the lower limit set for CO/FC refrigeration is subject to the minimum water outlet set under the antifreeze ratio set under PROJECT MENU.

Snow-Blowing switch

Select "SNOW-BLOWING SWITCH" under "USER MENU" page and press " ↵ ". Display as follows:

SNOW-BLOWING SWITCH
SNOW-BLOWING SWITCH YES ⏴ ⏵
OK ⏪ ⏩

Press "▲" and "▼" to select "YES" or "NO" and press "↵" to confirm. "YES" means the function is valid, "NO" means invalid.

Note: Some models do not have this function. Please refer to the instructions of the outdoor machine for whether they have anti-snow control function.

Silent mode:

Select "SILENT SWITCH" and press "↵". Display as follows:

SILENT SWITCH	
SELECT SILENT	◀NIGHT ▶ SILENT1
CURRENT SILENT	NIGHT SILENT1
OK	ⓘ

Press "▲" and "▼" to select "SELECT SILENT", press "◀" or "▶" to select the mode you need (7 types: NIGHT SILENT1-4, STANDARD, SILENT and SUPER SILENT), and press "↵" to save. Users can check whether it is the mode they want here and press "↶" to back if there is no problem. Once the silent mode turned on, in homepage light up.

NIGHT SILENT 1	6/10h
NIGHT SILENT 2	6/12h
NIGHT SILENT 3	8/10h
NIGHT SILENT 4	8/12h

Note: Night Silent1-4 is only available for MC-SU **-RN8L-B series models.

DHW SWITCH

Press "▲" and "▼" to select "DHW SWITCH" under "USER MENU" page and press "↵". Display as follows:

DHW SWITCH													
SELECT ADDRESS				◀ 11 ▶		#							
DHW SWITCH				◀ YES ▶									
DHW FIRST				◀ YES ▶									
00	01	02	03	04	05	06	07						
08	09	10	11	12	13	14	15						
OK												⏏	

Press "▲" and "▼" to switch between SELECT ADDRESS, DHW SWITCH and DHW FIRST. Then press"◀" or "▶" to adjust parameters.

Only when DHW SWITCH selects YES, the following can be set.

Note: DHW SWITCH is only available for custom made DHW models.

Water Coil Control

Press "▲" and "▼" to select "WATER COIL CONTROL" and press "↵". Display as follows:

WATER COIL CONTROL	
COIL CONTROL	◀AUTO▶
OK	
⏏	


Press "▲" and "▼" to select "COIL CONTROL" and press "◀" or "▶" to select control mode: AUTO (automatically control), MANUALON (with water coil), MANUALOFF (without water coil). Press "↵" to save. Press "↶" to exit this page.

Note: Water Coil Control is only applicable to FC models.

4.3.6.2 SERVICE MENU SETTING


Password input: Please contact us

Select "SERVICE MENU" and press "↵". The screen prompts for a password, as shown in the figure below:






Press "▲" and "▼" buttons to change the number to enter, and Press "◀" and "▶" buttons to change the bit code to enter. After the number is entered, the display is not changed. After entering the password, Press "↵" button to enter the interface or Press "↶" button to go back to the previous interface.

Display as follows if the input is incorrect:



Enter setting page as follows if the input is correct:



State query

Press "▲" or "▼" to select "STATE QUERY" under "SERVICE MENU" page. Then press "←" to enter submenu.

STATE QUERY	
SELECT ADDRESS	◀ 07 ▶ #
ODU MODEL	130 kW
COMP FREQUENCY	50 Hz
COMP1 CURRENT	20 A
COMP2 CURRENT	20 A
<div style="display: flex; justify-content: space-between; align-items: center;"> BACK 2/9 ⬇️ ⬅️ </div>	

STATE QUERY	
H-P PRESSURE	3.83 MPa
L-P PRESSURE	1.00 MPa
TP1 DISCHARGE TEMP	30 °C
TP2 DISCHARGE TEMP	30 °C
TH SUCTION TEMP	-20 °C
<div style="display: flex; justify-content: space-between; align-items: center;"> OK 2/9 ⬇️ </div>	

STATE QUERY	
TZ TEMP	-20°C
T3 TEMP	-20°C
T4 TEMP	-20°C
T6A TEMP	40°C
T6B TEMP	40°C
<div style="display: flex; justify-content: space-between; align-items: center;"> BACK 3/9 ⬇️ </div>	

STATE QUERY	
TFIN1 TEMP	60 °C
TFIN2 TEMP	60 °C
TDSH	30 °C
TSSH	15 °C
TCSH	15 °C
<div style="display: flex; justify-content: space-between; align-items: center;"> BACK 4/9 ⬇️ </div>	

STATE QUERY	
FAN1 SPEED	850 RPM
FAN2 SPEED	850 RPM
FAN3 SPEED	850 RPM
EXV A	1800 P
EXV B	1800 P
<div style="display: flex; justify-content: space-between; align-items: center;"> BACK 5/9 ⬇️ </div>	

STATE QUERY	
EXV C	1800P
Twi TEMP	30°C
Two TEMP	30°C
Tw TEMP	30°C
TAF1 TEMP	30°C
<div style="display: flex; justify-content: space-between; align-items: center;"> BACK 6/9 ⬇️ </div>	

STATE QUERY	
TAF2 TEMP	30 °C
T5 TEMP	30 °C
COMP TIME1	120 MIN
COMP TIME2	120 MIN
COMP TIME3	120 MIN
<div style="display: flex; justify-content: space-between; align-items: center;"> BACK 7/9 ⬇️ </div>	

STATE QUERY	
COMP TIME	65535 H
FIX PUMP TIME	65535 H
INV PUMP TIME	65535 H
ODU SOFTWARE	V45
HMI SOFTWARE	V45
<div style="display: flex; justify-content: space-between; align-items: center;"> BACK 8/9 ⬇️ </div>	

STATE QUERY	
DEFROSTING STATE	
00	01 02 03 04 05 06 07
08	09 10 11 12 13 14 15
E2 SOFTWARE V45	
END	
<div style="display: flex; justify-content: space-between; align-items: center;"> OK 9/9 ⬇️ ⬅️ </div>	

Press "◀" or "▶" to select the address of module to view (the offline address is skipped automatically). There are 9 pages and 41 state values. Press "▲" or "▼" buttons to select the different page.

Clear history errors:

Press "▲" or "▼" to select "CLEAR HISTORY ERRORS" and confirm by "↵".

SERVICE MENU
STATE QUERY
CLEAR HISTORY ERROR
SETTING ADDRESS
HEAT CONTROL
OK 1/3

CLEAR HISTORY ERRORS
CLEAR UNIT HISTORY ERRORS
CLEAR ALL HISTORY ERRORS
CLEAR LOCK ERROR
CLEAR RUN TIME
OK

Press "▲" or "▼" to select "CLEAR UNIT HISTORY ERRORS" and press "↵" to confirm. Display as follows:

CLEAR UNIT HIS ERRS	
SELECT ADDRESS	◀ 07 ▶
DO YOU WANT TO CLEAR?	◀ YES ▶
OK	↵

Press "▲" or "▼" to select "SELECT ADDRESS" and press "◀" or "▶" to select address value. Press "▲" or "▼" to select clear or not, and press "◀" or "▶" to select YES or NO, and press "↵" to confirm.

Press "▲" or "▼" to select "CLEAR ALL HIS ERRS" and press "↵" to confirm. Display as follows:


CLEAR ALL HIS ERRS	
DO YOU WANT TO CLEAR?	◀ YES ▶
OK	↵

Press "▲" or "▼" to select "CLEAR LOCK ERROR" and press "↵" to confirm. Display as follows:

CLEAR LOCK ERR	
DO YOU WANT TO CLEAR?	◀ YES ▶
OK	⏏

press "◀" or "▶" to select YES or NO, and press "↵" to confirm.

Press "▲" or "▼" to select "CLEAR RUN TIME" and press "←↵" to confirm. Display as follows:


CLEAR RUN TIME	
SELECT ADDRESS	◀ 07 ▶
CLEAR COMP TIME?	◀ NO ▶
CLEAR FIX PUMP TIME?	◀ NO ▶
CLEAR INV PUMP TIME?	◀ NO ▶
OK 	



Press "▲" or "▼" to select "SELECT ADDRESS", press "◀" or "▶" to select address value.

Press "▲" or "▼" to select clear or not, and press "◀" or "▶" to select YES or NO, and press "←↵" to confirm.

Setting address :

Press "▲" or "▼" under "SERVICE MENU" page to select "SETTING ADDRESS" (Can also enter by combining buttons pressing "⊖", "▶" for 3s). Press "←↵" and enter submenu.

SERVICE MENU	
STATE QUERY	
CLEAR HISTORY ERROR	
SETTING ADDRESS	
HEAT CONTROL	
OK	1/3 

SETTING ADDRESS	
CONTROLLER ADDRESS	◀ 10 ▶ #
CONTROL ENABEL	◀ NO ▶
MODBUS ENABLE	◀ NO ▶
MODBUS ADDRESS	◀ 10 ▶ #
OK	 

Press "▲" or "▼" to select item and press "◀" or "▶" to set value. Then press "←↵" to confirm and "↶" to back.

◆ Heat control

HEAT1 means pipe electric heating in cooling/heating mode. HEAT2 means tank electric heating in DHW mode.

Press "▲" or "▼" to select "HEAT CONTROL" under "SERVICE MENU" page. Press "←↵" and enter submenu.

SERVICE MENU
STATE QUERY
CLEAR HISTORY ERROR
SETTING ADDRESS
HEAT CONTROL
OK 1/3

HEAT CONTROL
HEAT1
HEAT2
FORCED HEAT2 OPEN
OK

Press "▲" or "▼" to select item to be set. Press "↵" and enter submenu.

HEAT1
HEAT1 ENABLE ◀ NO ▶
TEMP- ◀ 07 ▶ °C
AUXHEAT1-ON
TW.HEAT1-ON ◀ 25 ▶ °C
TW.HEAT1-OFF ◀ 45 ▶ °C
OK 1/2

HEAT2
ALL HEAT2 DISABLE ◀ YES ▶
SELECT ADDRESS ◀ 10 ▶ #
HEAT2-ENABLE ◀ NO ▶
T-HEAT2-DELAY ◀ 190 ▶ MIN
DT5-HEAT2-OFF ◀ 10 ▶ °C
OK 1/2

HEAT2
T4-HEAT2-ON ◀ 10 ▶ °C
00 01 02 03 04 05 06 07
08 09 10 11 12 13 14 15
OK 2/2

FORCED HEAT2 OPEN
SELECTED ADDRESS ◀ 10 ▶ #
FORCED HEAT2 OPEN ◀ NO ▶
00 01 02 03 04 05 06 07
08 09 10 11 12 13 14 15
OK

Press "▲" or "▼" to select item and press "◀" or "▶" to set value. Then press "↵" to confirm and "↶" to back.

Temperature Compensation:

Press "▲" or "▼" to select "TEMPERATURE COMPENSATION" under "SERVICE MENU" page. Press "↵" and enter submenu.

SERVICE MENU
TEMPERATURE COMPENSATION
PUMP CONTROL
MANUAL DEFROST
LOW OUTLET WATER CONTROL
OK 2/3

TEMP COMPENSATION	
COOL MODE ENABLE	◀ YES ▶ °C
T4 COOL-1	◀ 15 ▶ °C
T4 COOL-2	◀ 08 ▶ °C
OFFSET-C	◀ 10 ▶ °C
OK	1/2

TEMP COMPENSATION	
HEAT MODE ENABLE	◀ YES ▶ °C
T4 HEAT-1	◀ 15 ▶ °C
T4 HEAT-2	◀ 08 ▶ °C
OFFSET-H	◀ 10 ▶ °C
OK	2/2

Press "▲" or "▼" to select item and press "◀" or "▶" to set value. Then press "↵" to confirm.

Pump Control:

Press "▲" or "▼" to select "PUMP CONTROL" under "SERVICE MENU" page. Press "↵" and enter submenu.

SERVICE MENU
TEMPERATURE COMPENSATION
PUMP CONTROL
MANUAL DEFROST
LOW OUTLET WATER CONTROL
OK 2/3

PUMP CONTROL
FORCED PUMP OPEN
INV PUMP SETTING
PUMP ON/OFF TIME
OK

Press "▲" or "▼" to select "FORCED PUMP OPEN". Press "↵" and enter submenu.

FORCED PUMP OPEN	
SELECT ADDRESS	◀ 0 ▶ #
FORCED PUMP OPEN	◀ NO ▶
OK	

FORCED PUMP OPEN	
Cannot control the pump before shutting down.	

Under "FORCED PUMP OPEN" page, press "▲" or "▼" to select item and press "◀" or "▶" to set value. Press "↵" to confirm or "↶" to back. If the unit at that address is ON, the pump cannot be controlled by the wired controlled. Display as above.

Under "INV PUMP OPEN" page, press "▲" or "▼" to select item and press "◀" or "▶" to set value. Press "↵" to confirm or "↶" to back.

INV PUMP SETTING	
SELECT ADDRESS	◀ 07 ▶ #
SWITCH ON THE PUMP	◀ NO ▶
RATIO PUMP	◀ 100 ▶ #
OK	⏪ ⏩

Note: Can only be set under a single pump ,The setting range of RATIO-PUMP is 30%-100%. It should ensure its flow meet the requirement of whole unit, otherwise the unit may be damaged.

Under "PUMP CONTROL" page, press "▲" or "▼" to select item and press "◀" or "▶" to set value. Press "↵" to confirm or "↶" to back.

PUMP ON/OFF TIME	
PUMP ON TIME	◀ 05 ▶ MIN
PUMP OFF TIME	◀ 05 ▶ MIN
OK	⏪ ⏩

Parameter setting requirements are as follows:

	Set range	Default value	Adjustment range
PUMP ON TIME	5~60min	5	5
PUMP OFF TIME	0~60min	0	5

Manual Defrost

Press "▲" or "▼" to select "MANUAL DEFROST" under "SERVICE MENU" page. Press "↵" and enter submenu.

SERVICE MENU
TEMPERATURE COMPENSATION
PUMP CONTROL
MANUAL DEFROST
LOW OUTLET WATER CONTROL
OK 2/3

MANUAL DEFROST
SELECT ADDRESS ◀ 07 ▶ #
MANUAL DEFROST ◀ NO ▶
OK

Press "▲" or "▼" to select item to be set and press "◀" or "▶" to set value. Press "↵" to confirm or "↶" to back.

If the external unit successfully enters the defrost mode after the "MANUAL DEFROST" is turned on, the defrost icon will be displayed at homepage of the wired controller.


Low outlet water temperature control

Press "▲" or "▼" to select "LOW OUTLET WATER CONTROL" under "SERVICE MENU" page. Press "↵" and enter submenu. Suitable for HP-UNIT.

SERVICE MENU
TEMPERATURE COMPENSATION
PUMP CONTROL
MANUAL DEFROST
LOW OUTLET WATER CONTROL
OK 2/3

LOW OUTLET WATER CTRL
MIN TEMP FOR COOL ◀ 50°C ▶
HISTORICAL SETTING
04/06/2020 11:30A 5°C
04/06/2020 11:30A 5°C
04/06/2020 11:30A 5°C
OK



Press "◀" or "▶" to set value. Press "↵" to confirm or "↶" to back. At this page, the historical minimum water outlet temperature setting (setting range 0-20°C) can be viewed. When the setting temperature is less than 5°C, a prompt box will pop up:



Note: Only applicable to MC-SU **-RN8L-B series models. For other models, please refer to the instructions of the outdoor machine.

Vacuum mode

Press "▲" or "▼" to select "VACUUM SWITCH" under "SERVICE MENU" page. Press "↵" and enter submenu.



Press "◀" or "▶" to set YES or NO. Then press "↵" to confirm. Power off and restart is required to exit it.

Note: Only applicable to MC-SU **-RN8L-B series models. For other models, please refer to the instructions of the outdoor machine. Energy saving mode

Press "▲" or "▼" to select "ENERGY SAVING SWITCH" under "SERVICE MENU" page. Press "↵" and enter submenu.

PUMP OFF TIME PUMP DOWN TIME 0 ∞ 60min

SERVICE MENU
VACUUM SWITCH
ENERGY SAVING SWITCH
DHW ENABLE
FACTORY DATA RESET
OK 3/3

ENERGY SAVING SWITCH	
SAVING SWITCH	◀ 80% ▶
HISTORICAL SETTING	
04/06/2020 11:30A	80%
04/06/2020 11:30A	80%
04/06/2020 11:30A	80%
OK	

press "◀" or "▶" to set value. Press "↵" to confirm or "↶" to back.

Note: Only applicable to MC-SU **-RN8L-B series models. For other models, please refer to the instructions of the outdoor machine.

DHW ENABLE

Press "▲" or "▼" to select "DHW ENABLE" under "SERVICE MENU" page. Press "↵" and enter submenu.

DHW ENABLE	
DHW ENABLE	◀ NO ▶
OK	

Press "▲" or "▼" to set YES or NO. Press "↵" to confirm or "↶" to back.

Note: DHW ENABLE is only available for custom made DHW models.

Factory data reset:

Press "▲" or "▼" to select "FACTORY DATA RESET" under "SERVICE MENU" page. Press "↵" and enter submenu.

FACTORY DATA RESET	
DO YOU WANT TO RESET?	◀ YES ▶
OK	↵

Press "▲" or "▼" to select corresponding item and press "◀" or "▶" to select restore or not. Press "↵" to confirm or "↶" to back.

4.3.6.3 PROJECT MENU SETTING

Password input: Please contact us.

Select "PROJECT MENU" and press "↵" to entry. The screen prompts to enter the password, as shown in the figure below:

PROJECT MENU	
PLEASE INPUT THE PASSWORD	
0 0 0 0	
OK	↵

The initial password must be obtained by a professional. Press the "▲" or "▼" buttons to change the number to enter, and press the "◀" or "▶" buttons to change the bit code to enter. After the number is entered, the display is not changed. After entering the password, press the "↵" button to enter the interface; press the "↶" button to go back to the previous interface; the display is as follows if the input is incorrect:

PROJECT MENU	
SORRY WRONG PASSWORD PLEASE INPUT AGAIN	
0 0 0 0	
OK	↵

The query interface as follows is displayed if the input is correct:

PROJECT MENU
SET UNIT AIRCONDITIONING
SET PARALLEL UNIT
SET UNIT PROTECTION
SET DEFROSTING
OK 1/3

PROJECT MENU
SET DHW TIME
SET E9 TIME
INV PUMP RATIO
CHECK PARTS
OK 2/3

PROJECT MENU
PERCENT OF GLYCOL
WATER COIL CONTROL
OK 3/3

Unit Setting:

Select "SET UNIT AIRCONDITIONING" and press "↵" to entry. Display as follow:

SET UNIT	
TWO_COOL_DIFF	◀ 2 ▶ °C
TWO_HEAT_DIFF	◀ 2 ▶ °C
DT5_ON	◀ 8 ▶ °C
DTIS5	◀ 10 ▶ °C
DtTws	◀ 1 ▶ °C
OK	⬇ ⬆ ⬇


SET UNIT	
Dtmix	◀ 2 ▶ °C
FCoffset	◀ 2 ▶ °C
FChyser	◀ 1 ▶ °C
OK	⬇ ⬆ ⬇

Press "▲" or "▼" to select item and press "◀" or "▶" to set suitable temperature or time. Press "↵" to confirm. Back to homepage if there is no operation within 60s. Detailed setup information:

Parameter	Setting range	Note
Two_COOL_DIFF	1 ∞ 5°C	
Two_HEAT_DIFF	1 ∞ 5°C	
dT5_ON	2 ∞ 10°C	DHW
Dt1s5	5 ∞ 20°C	

Parallel units setting:

Select "SET PARALLEL UNIT" and press " ←] " to entry. Display as follows:

SET PAPPALLE UNIT	
TIM_CAP_ADJ	◀ 180 ▶ S
TW_COOL_DIFF	◀ 2 ▶ °C
TW_HEAT_DIFF	◀ 2 ▶ °C
RATIO_COOL_FIRST	◀ 0 ▶ %
RATIO_HEAT_FIRST	◀ 50 ▶ %
OK 	


Press " ▲ " or " ▼ " to select item to be set and press " ◀ " or " ▶ " to set value. Press " ←] " to confirm. Back to homepage if there is no operation within 60s.

Detailed setup information:

Parameter	Setting range
Tim_Cap_Adj	60s ∞ 360s
Tw_Cool_diff	1 ∞ 5°C
Tw_Heat_diff	1 ∞ 5°C
Ratio_cool_first	5 ∞ 100%
Ratio_heat_first	5 ∞ 100%

Unit protection setting:

Select "SET UNIT PROTECTION" and press " ←] " to entry. Display as follows:

SET UNIT PROTECTION	
T_DIFF_PRO	◀ 12 ▶ °C
TWI_OABNORMAL	◀ 2 ▶ °C
OK 	

Press " ▲ " or " ▼ " to select item to be set and press " ◀ " or " ▶ " to set value. Press " ↵ " to confirm. Back to homepage if there is no operation within 60s. Detailed setup information:

Parameter	Setting range
T_DIFF_PRO	8 ∼ 15°C
T_DIFF_PRO	1 ∼ 5°C

Defrosting Setting:

Select "SET DEFROSTING" and press " ↵ " to entry. Display as follows:

SET DEFROSTING	
T_FROST	◀ 35 ▶ min
T_DEFROST_IN	◀ 0 ▶ °C
T_FROST_OUT	◀ 0 ▶ °C
OK	↵

Press " ▲ " or " ▼ " to select item to be set and press " ◀ " or " ▶ " to set value. Press " ↵ " to confirm. Back to homepage if there is no operation within 60s.

Detailed setup information:

Parameter	Setting range
T_FROST	20 ∼ 120min
T_DEFROST_IN	-5 ∼ 5°C
T_FROST_OUT	-10 ∼ 10°C

DHW time setting:

Select "SET DHW TIME" and press " ↵ " to entry. Display as follows:

SET DHW TIME	
SELECT ADDRESS	◀ 07 ▶ #
COOL MAX TIME	◀ 08 ▶ h
COOL MIN TIME	◀ 0.5 ▶ h
HEAT MAX TIME	◀ 08 ▶ h
HEAT MIN TIME	◀ 0.5 ▶ h
OK	1/2

SET DHW TIME	
DHW MIN TIME	◀ 0.5 ▶ h
DHW MAX TIME	◀ 08 ▶ h
OK	2/2

Press "▲" or "▼" to select item to be set and press "◀" or "▶" to set value. Press "↵" to confirm. Back to homepage if there is no operation within 60s.

Detailed setup information:

Parameter	Setting range
SELECT ADDRESS	0 ~ 15
COOL MIN TIME	0.5~24h
COOL MAX TIME	0.5~24h
HEAT MIN TIME	0.5~24h
HEAT MAX TIME	0.5~24h
DHW MIN TIME	0.5~24h
DHW MAX TIME	0.5~24h

E9 Error time setting:

Select "SET E9 TIME" and press "↵" to entry. Display as follows:

SET E9 TIME	
E9 PROTECT TIME	◀ 10 ▶ S
E9 DETECTION METHOD	◀ 1 ▶ #

Press " ▲ " or " ▼ " to select item to be set and press " ◀ " or " ▶ " to set value (setting range 2-20s, default 5s, adjust interval 1s). Press " ⏪ " to confirm. Back to homepage if there is no operation within 60s. The setting range of "E9 DETECTION METHOD" is 1-2, default 1 (Method1: detect after pump starting. Method 2: detect before and after pump starting.)

Inverter pump output setting:

Select "INV PUMP RATIO" and enter the following page to select pump: Use in the case of multiple pumps, do not send instructions for single pump.

INV PUMP RATIO	
MIN RATIO	◀ 70 ▶ %
MAX RATIO	◀ 100 ▶ %
OK	⏪ ⏩

Press " ▲ " or " ▼ " to select item to be set and press " ◀ " or " ▶ " to set value. Press " ⏪ " to confirm. Back to homepage if there is no operation within 60s. MINRATIO setting should ensure its flow meet the requirement of the whole unit, otherwise the unit may be damaged.

MIN RATIO	MINIMUM RATIO	40 ∞ MAX RATIO
MAX RATIO	MAXIMUM RATIO	Max (70%, MIN RATIO) ∞ 100%

CHECK PARTS

Select "CHECK PARTS" and press " ⏪ " to entry submenu. Display as follows:

CHECK PARTS	
SELECT ADDRESS	◀ 07 ▶ #
FIX PUMP STATE	OFF
INV PUMP STATE	80%
FOUR-WAY VALVE	OFF
SV1 STATE	OFF
BACK	1/3

CHECK PARTS	
SV2 STATE	OFF
SV4 STATE	OFF
SV5 STATE	OFF
SV6 STATE	OFF
SV8A STATE	OFF
BACK	2/3

CHECK PARTS	
SV8B STATE	OFF
HEAT1 STATE	OFF
HEAT2 STATE	OFF
COIL VALVE	OFF
BACK	3/3

Press "▲" or "▼" to view 13 state. Press "↶" to return to the previous page.

PERCENT OF GLYCOL

Select "PERCENT OF GLYCOL" and press "↶" to entry submenu. Display as follows:

PERCENT OF GLYCOL	
GLYCOL TYPE	◀ ETHE ▶
SET THE PERCENT	◀ 70 ▶ %
TSAFE	5° C
PAF	0.7MPa
△PAF	◀ 0 ▶ MPa
BACK	1/2

PERCENT OF GLYCOL	
HISTORICAL SETTING	
04/06/2020 11:30A	80 %
04/06/2020 11:30A	80 %
04/06/2020 11:30A	80 %
04/06/2020 11:30A	80 %
OK	2/2

Press "▲" or "▼" to select item to be set and press "◀" or "▶" to set value. Press "↶" to confirm. Back to homepage if there is no operation within 60s. Up to 16 historical setting records.

Parameter	Setting range
GLYCOL TYPE	ETHE/PROP
SET THE PERCENT	0 ∞ 50%
TSAFE	DISPLAY
PAF	DISPLAY
△PAF	0 ∞ 0.2MPa
HISTORICAL SETTING	04/06/2020 12:00A
HISTORICAL SETTING	04/06/2020 12:00A
HISTORICAL SETTING	04/06/2020 12:00A

Water Coil Control

Press "▲" and "▼" to select "WATER COIL CONTROL" and press "↵". Display as follows:

WATER COIL CONTROL	
COIL CONTROL	◀AUTO ▶
OK	⏪

Press "▲" and "▼" to select "COIL CONTROL" and press "◀" or "▶" to select control mode: AUTO (automatically control), MANUALON (with water coil), MANUALOFF (without water coil). Press "↵" to save. Press "↶" to exit this page.

Note: Water Coil Control is only applicable to FC models.

4.3.7 Power Failure Memory Function

The power supply to the system fails unexpectedly during operation. When the system is powered on again, the wired controller continues to operate according to the status before the last power failure, including the power-on/off status, mode, set temperature, failure, protection, wired controller address, timer, hysteresis, etc. However, the memorized content must be the content set at least 7s before the power failure.

4.3.8 Parallel Function of Wired Controller

Parallel function by MODBUS:

- 1) A maximum of 16 wired controllers can be connected in parallel, and the address can be set in the range of 0 to 15.
- 2) After multiple wired controllers are connected in parallel, data is shared among them, e.g., the power-on/off function, data settings (such as the water temperature and hysteresis) and other parameters will be kept consistent (note: The mode, temperature, and hysteresis settings can be shared only when the system is powered on).
- 3) Start point of data sharing: After the power-on/off button is pressed, data can be shared during parameter adjustment. The " ← " button must be pressed after parameters are adjusted, and the finally adjusted values will be shared.
- 4) Since the bus is processed in the polling mode, the data of the wired controller which is set last is valid if multiple wired controllers are operated at the same time in the same bus cycle (4s). Avoid the above situation during operation.
- 5) After any one of parallel wired controllers has been reset, the address of this wired defaults no address and needs to be set manually in order to enter into normal communication.

Parallel function by XYE:

- 1) A maximum of 16 wired controllers can be connected in parallel
- 2) The wired controller need to set to control/monitor controller. The former has control functions, while the latter has only viewing functions.

4.3.9 Upper Computer Communication Function

- 1) When communicating with the upper computer, the homepage displays: Communication between the wired controller and the upper compute.
- 2) If the outdoor main control board is in the remote ON/OFF control mode and the wired controller icon flash. At this point, the upper computer network control setting line control mode switch machine is invalid.

4.3.10 Monitor Wired Controller Function

When the wired controller is set to monitor wired controller, press the "☰" to enter the following query interface and related settings of the controller.

CHECK MENU
QUERY
GENERAL SETTING
STATE QUERY
SETTING ASSRESS
OK 